


[illegible][illegible]

* VALIDO ANCHE PER TUBO CONDUTTIVO
(ALSO VALID FOR CONDUCTING TUBE)

DOPO LA PRESSATURA

tampone GO -PASSA-
tampone NO-GO -NON PASSA-
COLLAPSE CONTROL MANOREL
SPINE CONTROLLO COLLASSO

HOW TO READ THIS CHART

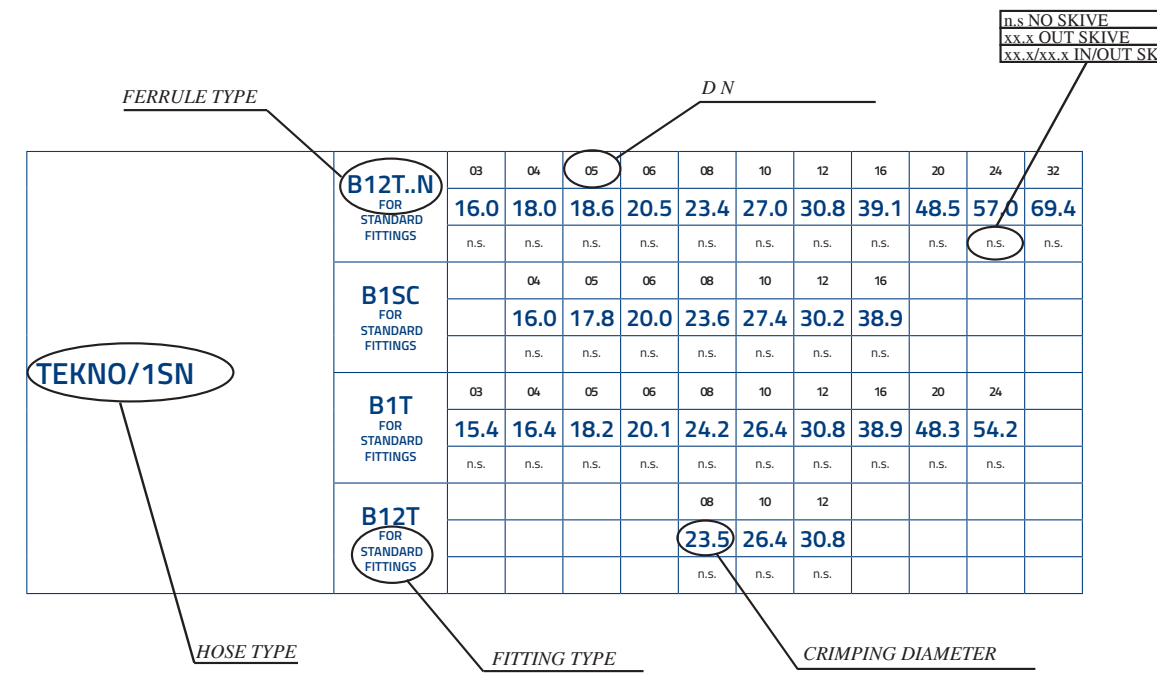

INSERT BORE COLLAPSE CONTROL

Controllo del collasso

WIRE BRAIDED HOSES
STANDARD FITTINGS

Tubo trecciato
Raccordo standard

NOMINAL SIZE		GO, NO GO MANDELS DIAMETERS (mm)	
		GO	NO-GO
03	3/16"	2.30	2.80
04	1/4"	3.30	3.75
05	5/16"	4.70	5.20
06	3/8"	6.05	6.55
08	1/2"	8.35	8.75
10	5/8"	10.85	11.40
12	3/4"	13.50	13.80
16	1"	18.50	19.20
20	1 1/4"	23.05	23.90
24	1 1/2"	29.80	30.70
32	2"	41.60	42.60

WIRE SPIRAL HOSES
STANDARD FITTINGS

Tubo spiralato
Raccordo standard

NOMINAL SIZE		GO, NO GO MANDRELS DIAMETERS (mm)	
		GO	NO-GO
04	1/4"	3.15	3.60
06	3/8"	5.60	6.25
08	1/2"	7.60	8.40
10	5/8"	10.05	10.90
12	3/4"	12.35	13.30
16	1"	17.30	18.35
20	1 1/4"	22.25	23.35
24	1 1/2"	29.15	30.30
32	2"	40.70	42.00

WIRE SPIRAL HOSES
INTERLOCK FITTINGS

NOMINAL SIZE		GO, NO GO MANDRELS DIAMETERS (mm)	
		GO	NO-GO
12	3/4"	12.15	13.10
16	1"	16.50	17.55
20	1.1/4"	22.25	23.35
24	1.1/2"	27.15	28.30
32	2"	38.70	40.00

FILLIO technical department rev. 08/01 22-67